


MULTIFLEX
SPAN 4 m,
Ht 2,30 m

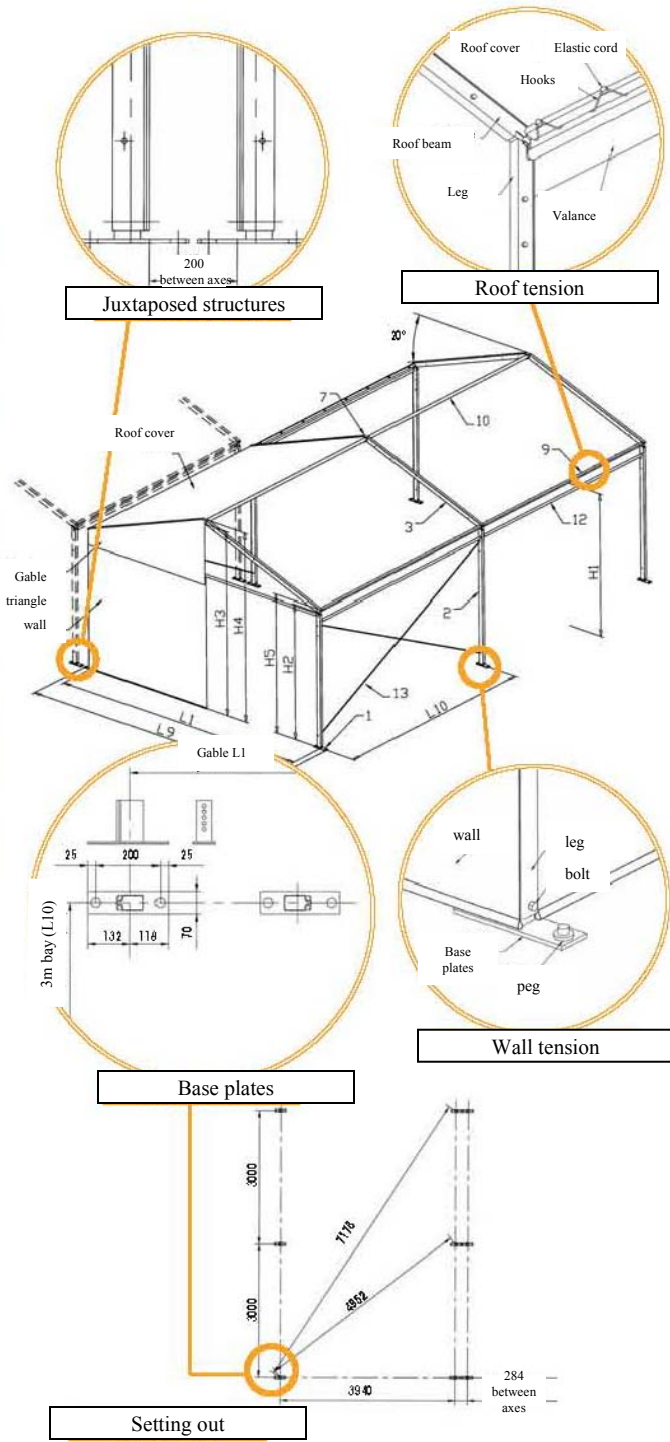

Specifications		4m ht 2,3
Span	L10	3,94
Overall Width	L9	4,2
External lateral height	H5	2,28
Internal lateral height	H2	2,22
External ridge height	H4	3,01
Internal ridge height	H3	2,93
Under eaves height	H1	2,25
Lateral bay	L10	3
Gable bay		3,94
Roof Pitch		20°
Base Plate	1	70x250
Leg	2	84x48
Roof Beam	3	84x48
Apex joint	7	
Eaves purlin	9	40x40
Ridge purlin	10	40x40
Number of purlins per bay		3
Lateral bracing cable/alu tube	13	diam. 4 mm
High wall bar	12	diam. 40 mm

Erection/dismantling	Example 4x9x2,3 m
Number of people	2
Total duration of erection	2,30 hours
vehicles + duration	
Erection kit	Option
Time saved for dismantling	20%

* exemples details and explanations page 112

Anchoring and weighting	Anchoring			Weighting	
	Uplift force kg	Coef.	Number of pegs	Uplift force kg	Coef.
Common + braced base plate	500	2	1 lg 900	410	1,65

* exemples details and explanations page 112