


Product Line Overview

Party and Exhibition Halls / Storage Halls

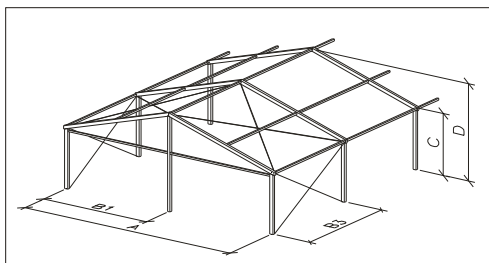


Truss-distance 5 m

Type	Width (A) m	Eave height (C) m	Ridge height (D) m	Roof slope °	Longest component m
8,1/250	8,04	2,29	3,75	20,00	5,50
8,1/280	8,04	2,79	4,25	20,00	5,50
8,3/280	8,28	2,84	4,19	18,00	5,60
8,3/340	8,28	3,24	4,59	18,00	5,80
8,3/400	8,28	3,84	5,19	18,00	6,20
8,3/540	8,28	5,24	6,59	18,00	6,46
10/240	9,88	2,35	4,14	20,00	5,50
10/280	9,88	2,80	4,59	20,00	5,50
10,1/250	10,07	2,29	4,12	20,00	5,50
10,1/280	10,07	2,79	4,62	20,00	5,50
10,2/280	10,03	2,85	4,48	18,00	5,45
10,2/340	10,03	3,25	4,88	18,00	5,45
10,3/280	10,08	2,84	4,47	18,00	5,46
10,3/340	10,08	3,24	4,87	18,00	5,46
10,3/400	10,08	3,84	5,47	18,00	5,46
10,3/540	10,08	5,24	6,88	18,00	6,75
10,5/340	10,18	3,26	4,91	18,00	5,31
10,5/400	10,18	3,86	5,51	18,00	5,31
10,5/540	10,18	5,26	6,91	18,00	6,77
11,2/280	11,03	2,85	4,64	18,00	5,98
11,2/340	11,03	3,25	5,04	18,00	5,98
11,3/280	11,08	2,84	4,64	18,00	5,89
11,3/340	11,08	3,24	5,04	18,00	5,89
11,3/400	11,08	3,84	5,64	18,00	5,89
12/240	12,00	2,40	4,58	20,00	6,60
12,2/280	12,03	2,85	4,80	18,00	6,51
12,2/340	12,03	3,25	5,20	18,00	6,51
12,3/280	12,08	2,84	4,80	18,00	6,50
12,3/340	12,08	3,24	5,20	18,00	6,50
12,3/400	12,08	3,84	5,80	18,00	6,50
15,2/280	15,03	2,85	5,29	18,00	8,08
15,2/340	15,03	3,25	5,69	18,00	8,08
15,3/280	15,08	2,84	5,28	18,00	8,08
15,3/340	15,08	3,24	5,68	18,00	8,08
15,3/400	15,08	3,84	6,28	18,00	8,08
15,4/280	15,13	2,85	5,31	18,00	7,95
15,4/340	15,13	3,25	5,71	18,00	7,95
15,4/400	15,13	3,85	6,31	18,00	7,95
15,5/340	15,18	3,26	5,73	18,00	7,98
15,5/400	15,18	3,86	6,33	18,00	7,98
15,5/540	15,18	5,26	7,73	18,00	7,98

Version: 09.07.2004

Product Line Overview

Party and Exhibition Halls / Storage Halls

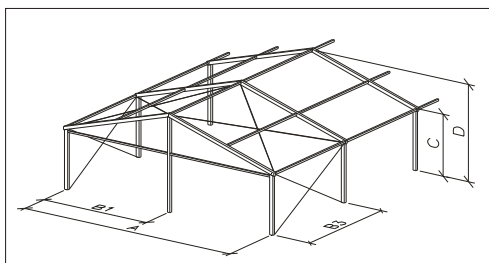

Truss-distance 5 m

Type	Width (A) m	Eave height (C) m	Ridge height (D) m	Roof slope °	Longest component m
16/240	15,75	2,40	5,27	20,00	8,71
16/400	15,75	3,86	6,73	20,00	8,71
16,3/280	16,08	2,84	5,45	18,00	8,61
16,3/340	16,08	3,24	5,85	18,00	8,61
16,3/400	16,08	3,84	6,45	18,00	8,61
18,2/280	18,03	2,85	6,38	18,00	9,61
18,2/340	18,03	3,25	5,98	18,00	9,61
18,3/340	18,08	3,24	6,18	18,00	9,63
20,3/280	20,08	2,84	6,10	18,00	10,71
20,3/340	20,08	3,24	6,50	18,00	10,71
20,3/400	20,08	3,84	7,10	18,00	10,71
20,4/280	20,13	2,85	6,12	18,00	10,60
20,4/340	20,13	3,25	6,52	18,00	10,60
20,4/400	20,13	3,85	7,12	18,00	10,60
20,5/340	20,18	3,26	6,54	18,00	10,61
20,5/400	20,18	3,86	7,14	18,00	10,61
20,5/540	20,18	5,26	8,54	18,00	10,61
21/240	20,75	2,40	6,18	20,00	11,37
21/400	20,75	3,86	7,64	20,00	11,37
21,3/280	21,08	2,84	6,26	18,00	11,20
21,3/340	21,08	3,24	6,66	18,00	11,20
21,3/400	21,08	3,84	7,26	18,00	11,20
25,3/280	25,08	2,84	6,91	18,00	8,08
25,3/340	25,08	3,24	7,31	18,00	8,08
25,3/400	25,08	3,84	7,92	18,00	8,06
25,4/280	25,13	2,85	6,93	18,00	7,97
25,4/340	25,13	3,25	7,33	18,00	7,97
25,4/400	25,13	3,85	7,93	18,00	7,97
25,5/340	25,18	3,26	7,35	18,00	10,61
25,5/400	25,18	3,86	7,95	18,00	10,61
25,5/540	25,18	5,26	9,35	18,00	10,61
30,4/280	30,13	2,85	7,74	18,00	10,60
30,4/340	30,13	3,25	8,14	18,00	10,60
30,4/400	30,13	3,85	8,74	18,00	10,60
30,5/340	30,18	3,26	8,16	18,00	10,61
30,5/400	30,18	3,86	8,76	18,00	10,61
30,5/540	30,18	5,26	10,18	18,00	10,61
35,5/400	35,18	3,86	9,58	18,00	11,80
40,5/340	40,18	3,26	9,78	18,00	10,61
40,5/400	40,18	3,86	10,38	18,00	10,61
40,5/540	40,18	5,26	11,78	18,00	11,60
50,5/340	50,18	3,26	11,41	18,00	11,20
50,5/400	50,18	3,86	12,01	18,00	11,80

Version: 09.07.2004

Losberger Intertent GmbH
 Gottlieb-Daimler-Ring 14
 D-74906 Bad Rappenau
 Phone: +49 70 66 / 98 00
 Fax: +49 70 66 / 98 02 32
 e-mail: Losberger@Losberger.com
 www.Losberger.com

Build on Quality
LOSBERGER